

LAMPIRAN

Tabel L.1 Sifat Fisik Air

878
APPENDIX 1

TABLE A-9

Properties of saturated water

Temp. <i>T</i> , °C	Saturation Pressure <i>P</i> _{sat} , kPa	Density ρ , kg/m ³		Enthalpy of Vaporization <i>h</i> _{fg} , kJ/kg	Specific Heat <i>c</i> _p , J/kg·K		Thermal Conductivity <i>k</i> , W/m·K		Dynamic Viscosity μ , kg/m·s		Prandtl Number <i>Pr</i>		Volume Expansion Coefficient β , 1/K
		Liquid	Vapor		Liquid	Vapor	Liquid	Vapor	Liquid	Vapor	Liquid	Vapor	
0.01	0.6113	999.8	0.0048	2501	4217	1854	0.561	0.0171	1.792×10^{-3}	0.922×10^{-5}	13.5	1.00	-0.068×10^{-3}
5	0.8721	999.9	0.0068	2490	4205	1857	0.571	0.0173	1.519×10^{-3}	0.934×10^{-5}	11.2	1.00	0.015×10^{-3}
10	1.2276	999.7	0.0094	2478	4194	1862	0.580	0.0176	1.307×10^{-3}	0.946×10^{-5}	9.45	1.00	0.733×10^{-3}
15	1.7051	999.1	0.0128	2466	4185	1863	0.589	0.0179	1.138×10^{-3}	0.959×10^{-5}	8.09	1.00	0.138×10^{-3}
20	2.339	998.0	0.0173	2454	4182	1867	0.598	0.0182	1.002×10^{-3}	0.973×10^{-5}	7.01	1.00	0.195×10^{-3}
25	3.169	997.0	0.0231	2442	4180	1870	0.607	0.0186	0.891×10^{-3}	0.987×10^{-5}	6.14	1.00	0.247×10^{-3}
30	4.246	996.0	0.0304	2431	4178	1875	0.615	0.0189	0.798×10^{-3}	1.001×10^{-5}	5.42	1.00	0.294×10^{-3}
35	5.628	994.0	0.0397	2419	4178	1880	0.623	0.0192	0.720×10^{-3}	1.016×10^{-5}	4.83	1.00	0.337×10^{-3}
40	7.384	992.1	0.0512	2407	4179	1885	0.631	0.0196	0.653×10^{-3}	1.031×10^{-5}	4.32	1.00	0.377×10^{-3}
45	9.593	990.1	0.0655	2395	4180	1892	0.637	0.0200	0.596×10^{-3}	1.046×10^{-5}	3.91	1.00	0.415×10^{-3}
50	12.35	988.1	0.0831	2383	4181	1900	0.644	0.0204	0.547×10^{-3}	1.062×10^{-5}	3.55	1.00	0.451×10^{-3}
55	15.76	985.2	0.1045	2371	4183	1908	0.649	0.0208	0.504×10^{-3}	1.077×10^{-5}	3.25	1.00	0.484×10^{-3}
60	19.94	983.3	0.1304	2359	4185	1916	0.654	0.0212	0.467×10^{-3}	1.093×10^{-5}	2.99	1.00	0.517×10^{-3}
65	25.03	980.4	0.1614	2346	4187	1926	0.659	0.0216	0.433×10^{-3}	1.110×10^{-5}	2.75	1.00	0.548×10^{-3}
70	31.19	977.5	0.1983	2334	4190	1936	0.663	0.0221	0.404×10^{-3}	1.126×10^{-5}	2.55	1.00	0.578×10^{-3}
75	38.58	974.7	0.2421	2321	4193	1948	0.667	0.0225	0.378×10^{-3}	1.142×10^{-5}	2.38	1.00	0.607×10^{-3}
80	47.39	971.8	0.2935	2309	4197	1962	0.670	0.0230	0.355×10^{-3}	1.159×10^{-5}	2.22	1.00	0.653×10^{-3}
85	57.83	968.1	0.3536	2296	4201	1977	0.673	0.0235	0.333×10^{-3}	1.176×10^{-5}	2.08	1.00	0.670×10^{-3}
90	70.14	965.3	0.4235	2283	4206	1993	0.675	0.0240	0.315×10^{-3}	1.193×10^{-5}	1.96	1.00	0.702×10^{-3}
95	84.55	961.5	0.5045	2270	4212	2010	0.677	0.0246	0.297×10^{-3}	1.210×10^{-5}	1.85	1.00	0.716×10^{-3}
100	101.33	957.9	0.5978	2257	4217	2029	0.679	0.0251	0.282×10^{-3}	1.227×10^{-5}	1.75	1.00	0.750×10^{-3}
110	143.27	950.6	0.8263	2230	4229	2071	0.682	0.0262	0.255×10^{-3}	1.261×10^{-5}	1.58	1.00	0.798×10^{-3}
120	198.53	943.4	1.121	2203	4244	2120	0.683	0.0275	0.232×10^{-3}	1.296×10^{-5}	1.44	1.00	0.858×10^{-3}
130	270.1	934.6	1.496	2174	4263	2177	0.684	0.0288	0.213×10^{-3}	1.330×10^{-5}	1.33	1.01	0.913×10^{-3}
140	361.3	921.7	1.965	2145	4286	2244	0.683	0.0301	0.197×10^{-3}	1.365×10^{-5}	1.24	1.02	0.970×10^{-3}
150	475.8	916.6	2.546	2114	4311	2314	0.682	0.0316	0.183×10^{-3}	1.399×10^{-5}	1.16	1.02	1.025×10^{-3}
160	617.8	907.4	3.256	2083	4340	2420	0.680	0.0331	0.170×10^{-3}	1.434×10^{-5}	1.09	1.05	1.145×10^{-3}
170	791.7	897.7	4.119	2050	4370	2490	0.677	0.0347	0.160×10^{-3}	1.468×10^{-5}	1.03	1.05	1.178×10^{-3}
180	1,002.1	887.3	5.153	2015	4410	2590	0.673	0.0364	0.150×10^{-3}	1.502×10^{-5}	0.983	1.07	1.210×10^{-3}
190	1,254.4	876.4	6.388	1979	4460	2710	0.669	0.0382	0.142×10^{-3}	1.537×10^{-5}	0.947	1.09	1.280×10^{-3}
200	1,553.8	864.3	7.852	1941	4500	2840	0.663	0.0401	0.134×10^{-3}	1.571×10^{-5}	0.910	1.11	1.350×10^{-3}
220	2,318	840.3	11.60	1859	4610	3110	0.650	0.0442	0.122×10^{-3}	1.641×10^{-5}	0.865	1.15	1.520×10^{-3}
240	3,344	813.7	16.73	1767	4760	3520	0.632	0.0487	0.111×10^{-3}	1.712×10^{-5}	0.836	1.24	1.720×10^{-3}
260	4,688	783.7	23.69	1663	4970	4070	0.609	0.0540	0.102×10^{-3}	1.788×10^{-5}	0.832	1.35	2.000×10^{-3}
280	6,412	750.8	33.15	1544	5280	4835	0.581	0.0605	0.094×10^{-3}	1.870×10^{-5}	0.854	1.49	2.380×10^{-3}
300	8,581	713.8	46.15	1405	5750	5980	0.548	0.0695	0.086×10^{-3}	1.965×10^{-5}	0.902	1.69	2.950×10^{-3}
320	11,274	667.1	64.57	1239	6540	7900	0.509	0.0836	0.078×10^{-3}	2.084×10^{-5}	1.00	1.97	
340	14,586	610.5	92.62	1028	8240	11,870	0.469	0.110	0.070×10^{-3}	2.255×10^{-5}	1.23	2.43	
360	18,651	528.3	144.0	720	14,690	25,800	0.427	0.178	0.060×10^{-3}	2.571×10^{-5}	2.06	3.73	
374.14	22,090	317.0	317.0	0	—	—	—	—	0.043×10^{-3}	4.313×10^{-5}			


Note 1: Kinematic viscosity ν and thermal diffusivity α can be calculated from their definitions, $\nu = \mu/\rho$ and $\alpha = k/\rho c_p = \nu/Pr$. The temperatures 0.01°C, 100°C, and 374.14°C are the triple-, boiling-, and critical-point temperatures of water, respectively. The properties listed above (except the vapor density) can be used at any pressure with negligible error except at temperatures near the critical-point value.

Note 2: The unit kJ/kg·°C for specific heat is equivalent to kJ/kg·K, and the unit W/m·°C for thermal conductivity is equivalent to W/m·K.


Source: Viscosity and thermal conductivity data are from J. V. Sengers and J. T. R. Watson, *Journal of Physical and Chemical Reference Data* 15 (1986), pp. 1291–1322. Other data are obtained from various sources or calculated.

Tabel L.2 Jadwal Penelitian


No	Rencana Kerja	Bulan-Ke					
		I	II	III	IV	V	VI
1.	Studi Pustaka						
2.	Seminar Proposal						
3.	Pembuatan Alat						
4.	Pengambilan Data						
5.	Pengelolaan Data						
6.	Pembahasan						
7.	Kesimpulan Dan Saran						
8.	Seminar Hasil						
9.	Ujian						

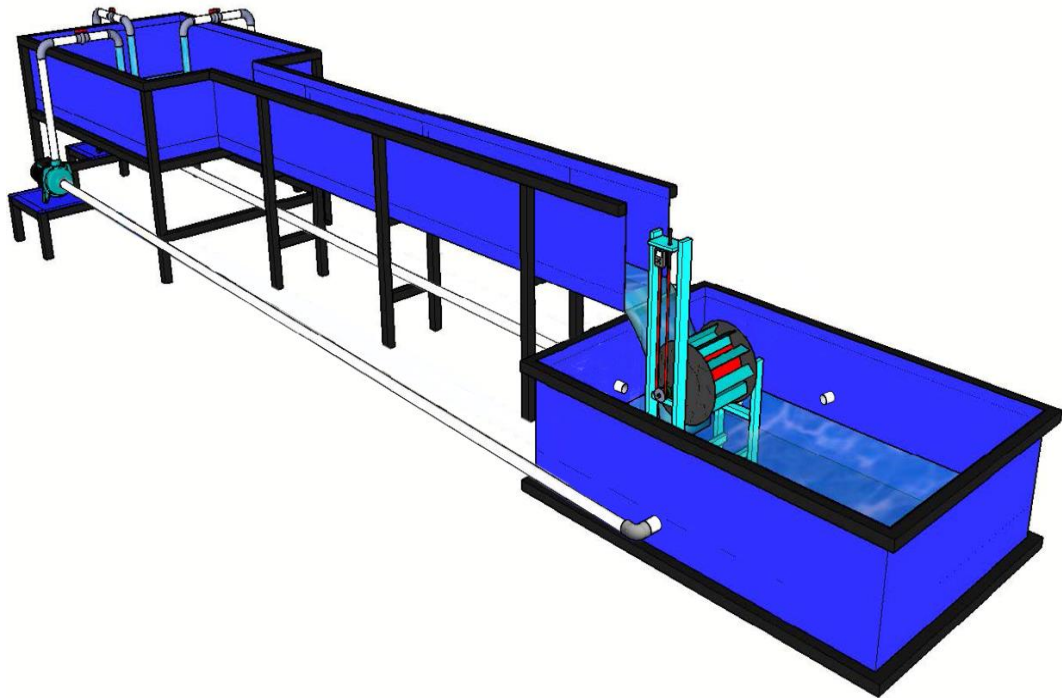


Gambar L.3 Layout kincir air *pitchback* dengan variasi sudut sudu model melengkung

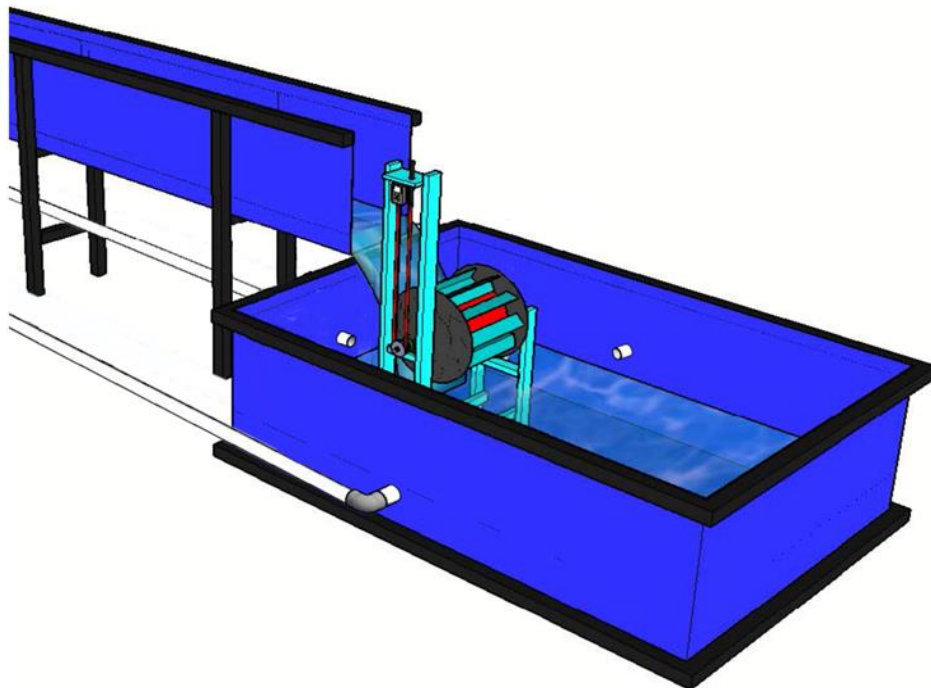


Gambar L.4 Rotor kincir air *pitchback* dengan variasi sudut sudu model melengkung

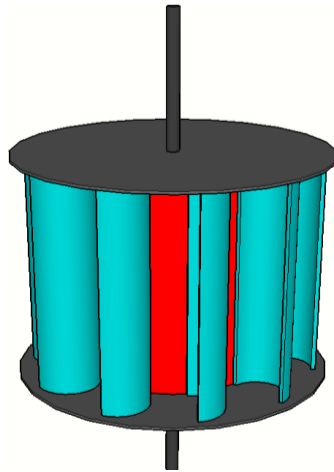


Gambar L.5 Rotor kincir air *pitchback* 10 sudu model melengkung dengan kemiringan sudu 120°

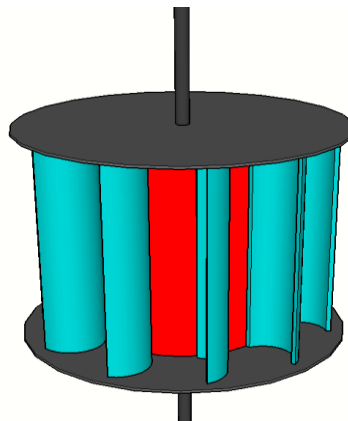


Gambar L.6 Rotor kincir air *pitchback* 10 sudu model melengkung dengan kemiringan sudu 150°

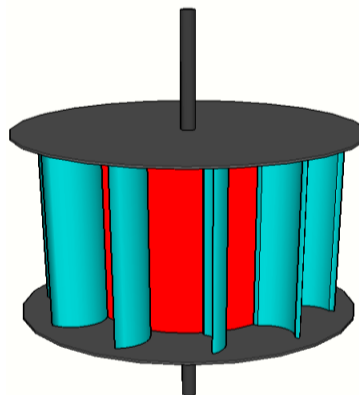





Gambar L.7 Rotor kincir air *pitchback* 10 sudu model melengkung dengan kemiringan sudu , 180°

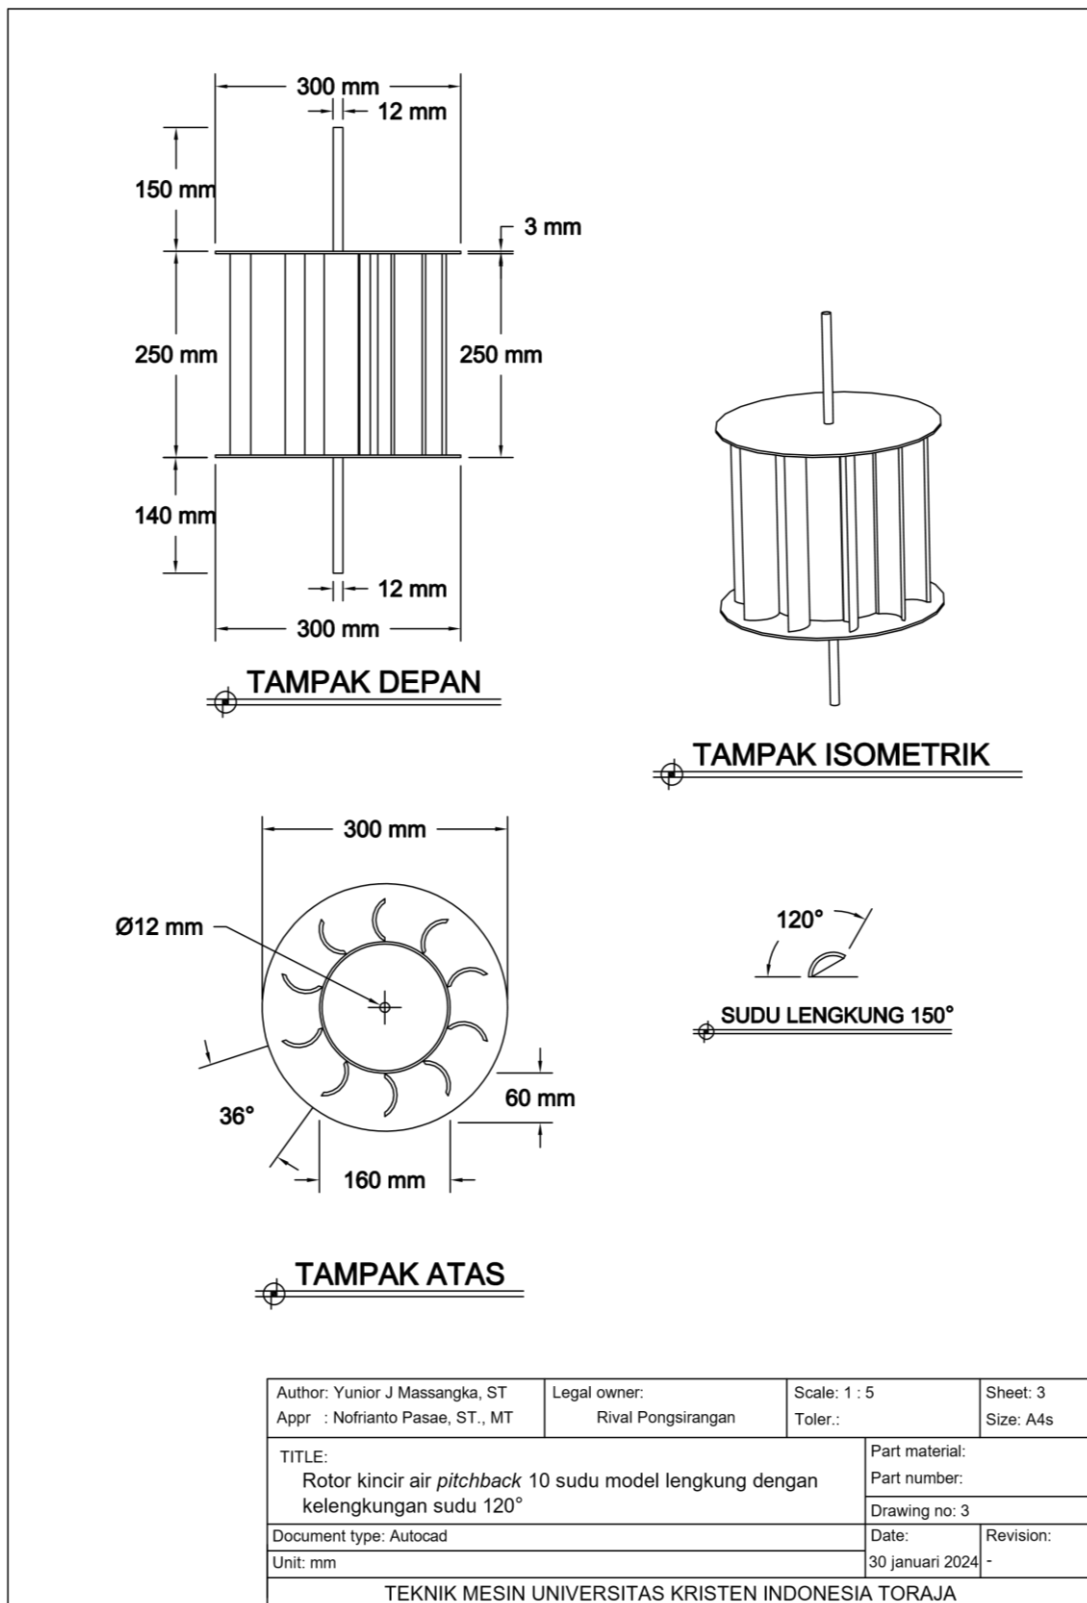

Gambar L.8 Rotor kincir air *pitchback* 10 sudu model melengkung dengan kemiringan sudu 120°

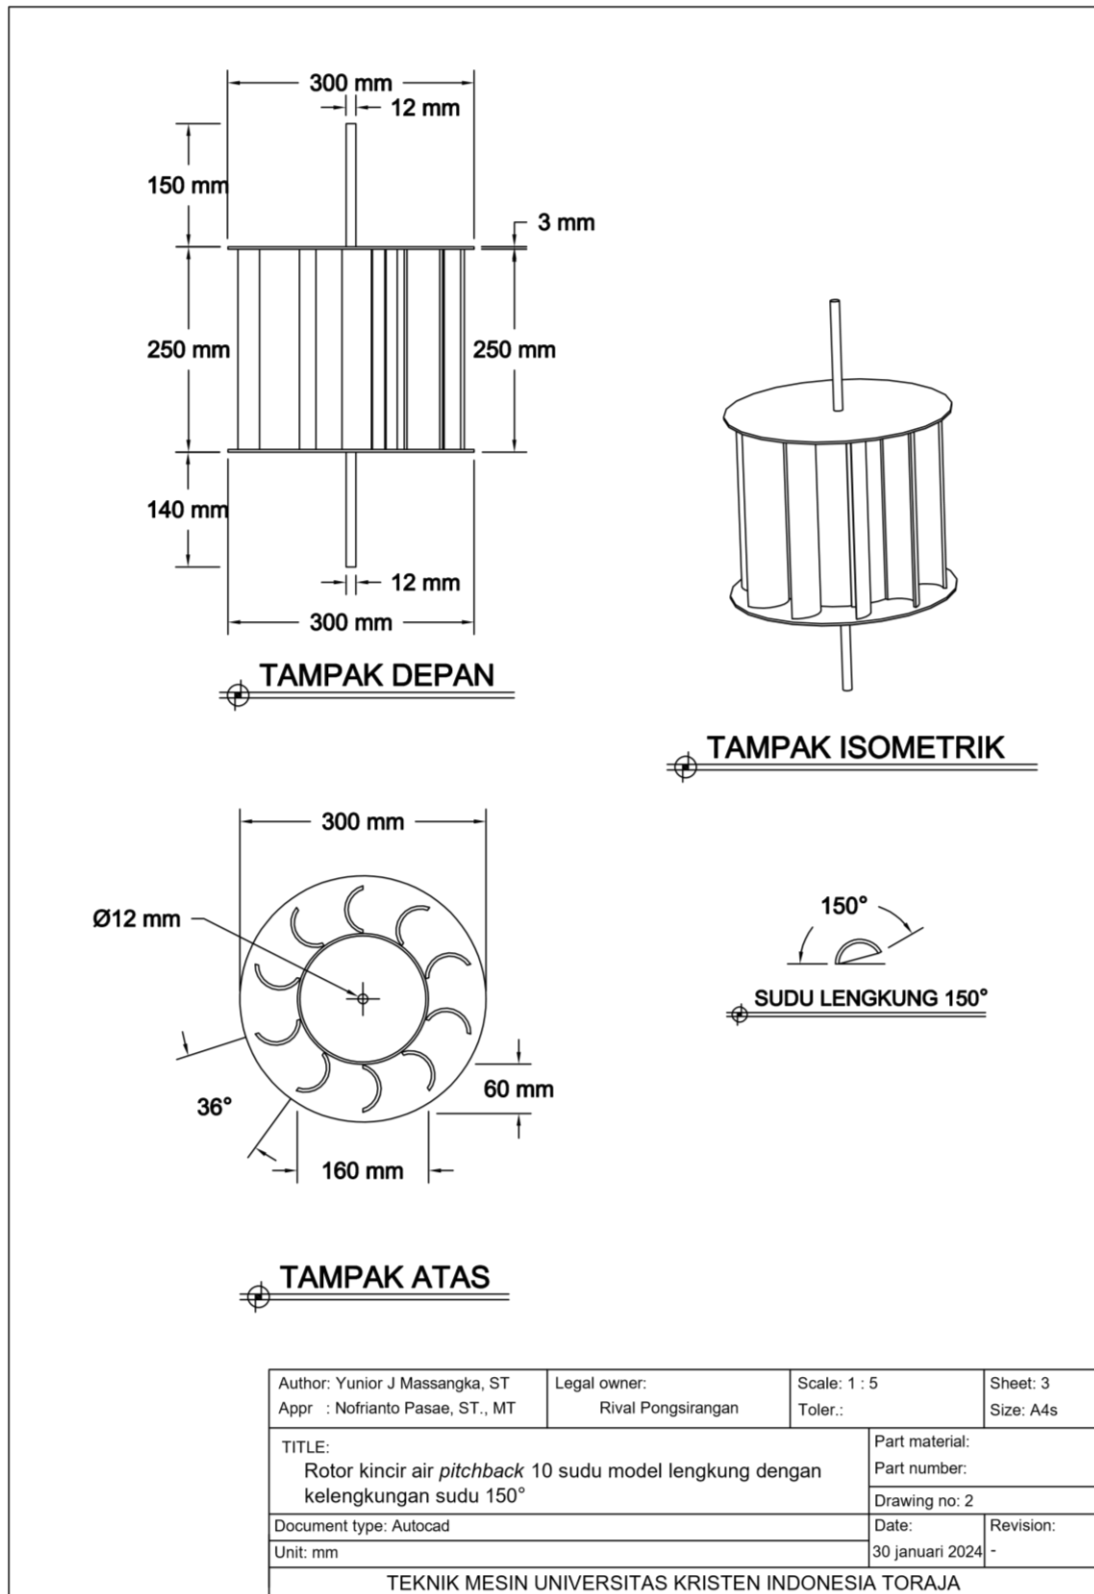


Gambar L.9 Rotor kincir air *pitchback* 10 sudu model melengkung dengan kemiringan sudu 150°

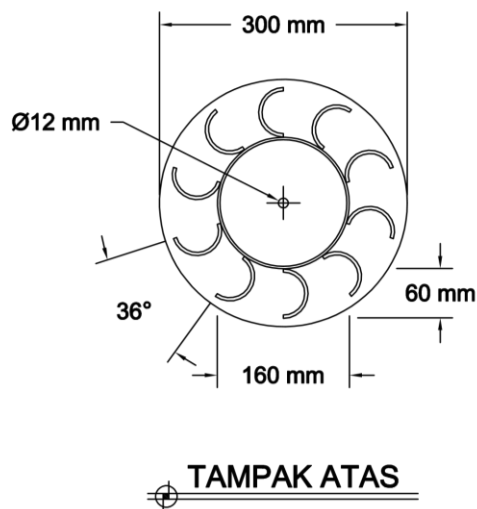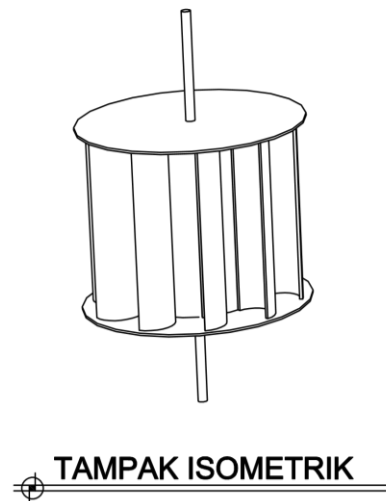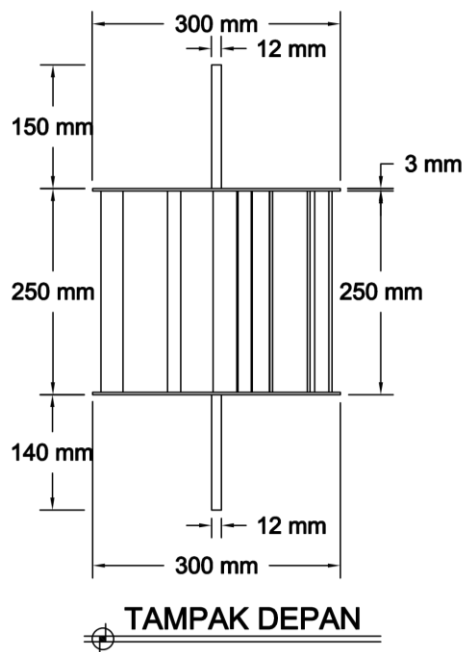


Author: Yunior J Massangka, ST Appr : Nofrianto Pasae, ST., MT	Legal owner: Rival Pongsirangan	Scale: 1 : 5 Toler.:	Sheet: 3 Size: A4s
TITLE: Rotor kincir air <i>pitchback</i> 10 sudu model lengkung dengan kelengkungan sudu 180°		Part material: Part number: Drawing no: 1	
Document type: Autocad Unit: mm		Date: 30 Januari 2024	Revision: -
TEKNIK MESIN UNIVERSITAS KRISTEN INDONESIA TORAJA			

Gambar L.10 Rotor kincir air *pitchback* 10 sudu model melengkung dengan kemiringan sudu 180°

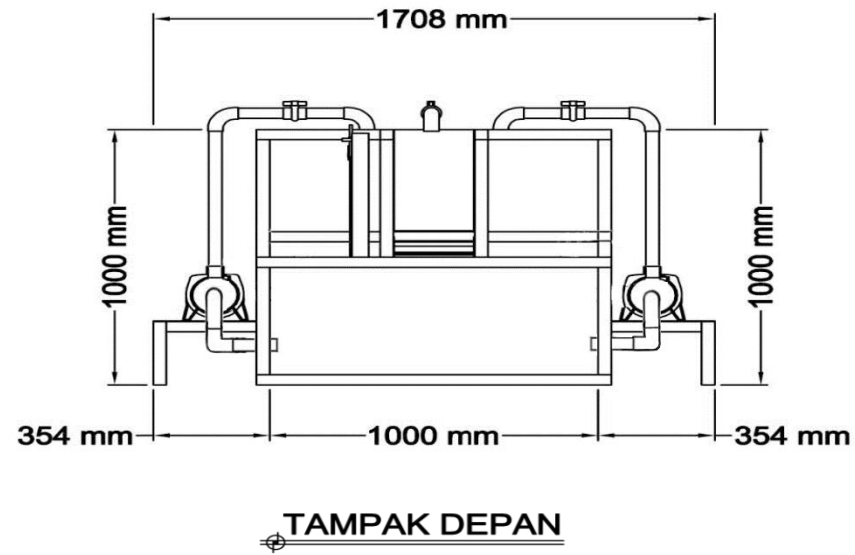

Author: Yunior J Massangka, ST Appr : Nofrianto Pasae, ST., MT	Legal owner: Rival Pongsirangan	Scale: 1 : 5 Toler.:	Sheet: 3 Size: A4s
TITLE: Layout kincir air <i>pitchback</i> tampak depan		Part material:	
		Part number:	
Document type: Autocad		Drawing no: 4	
Unit: mm		Date: 30 januari 2024	Revision: -
TEKNIK MESIN UNIVERSITAS KRISTEN INDONESIA TORAJA			


Gambar L.11 Layout kincir air *pitchback* tampak depan

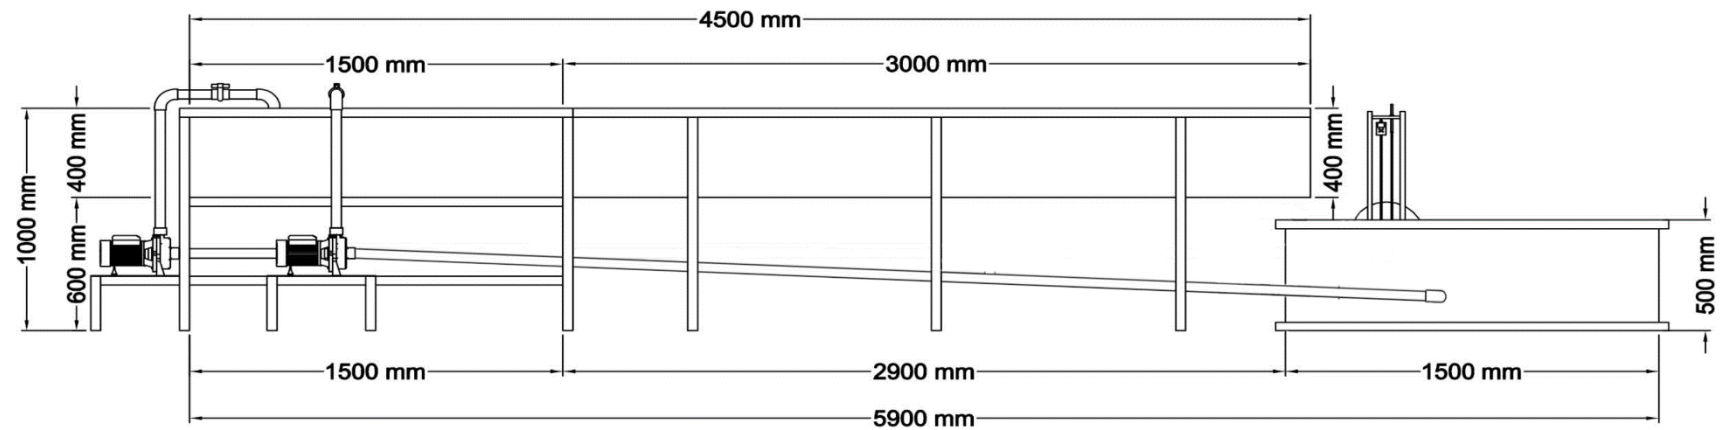

TAMPAK SAMPING

Author: Yunior J Massangka, ST Appr : Nofrianto Pasae, ST., MT	Legal owner: Rival Pongsirangan	Scale: 1 : 5 Toler.:	Sheet: 3 Size: A4s
TITLE: Layout kincir air <i>pitchback</i> tampak samping		Part material: Part number:	
Document type: Autocad		Drawing no: 5	
Unit: mm		Date: 30 januari 2024	Revision: -
TEKNIK MESIN UNIVERSITAS KRISTEN INDONESIA TORAJA			

Gambar L.12 Layout kincir air *pitchback* tampak samping

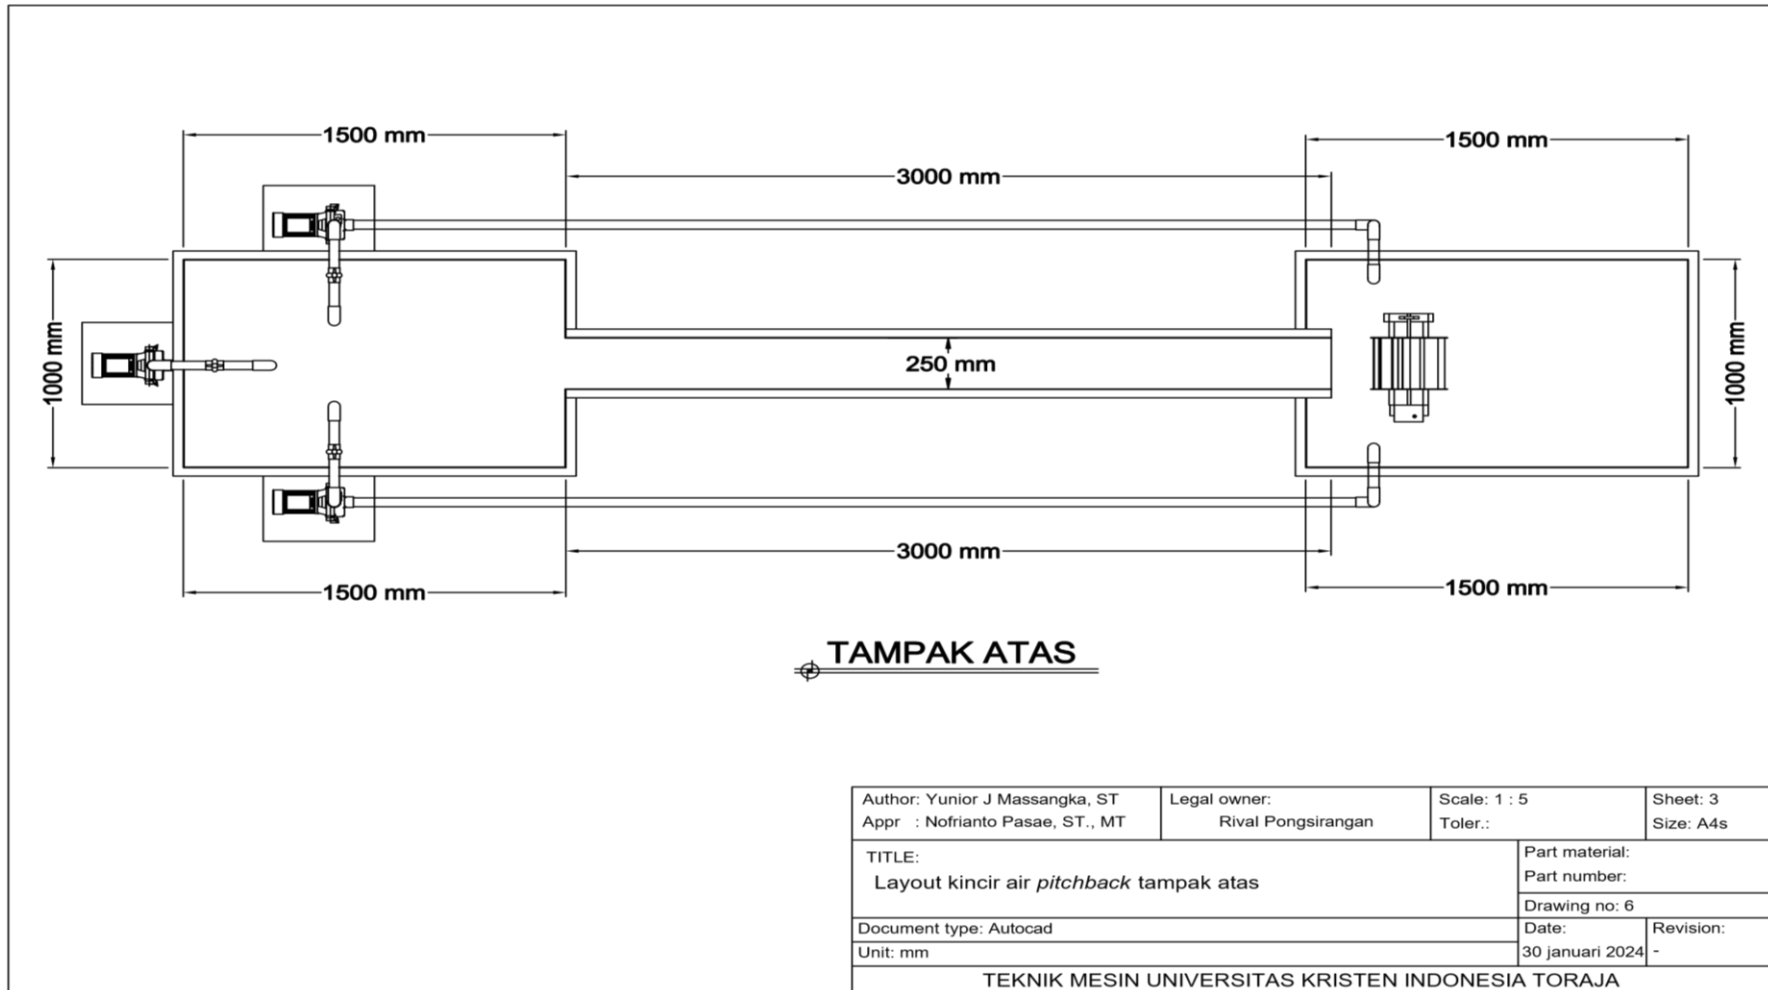

Gambar L.13 Layout kincir airpitchback tampak atas



Gambar L.14 Proses pemotongan sudu kincir



Gambar L.15 Proses pemasangan diameter sudu



Gambar L.16 Proses pengecatan diameter sudu



Gambar L.17 Rator kincir air *pitchback* 10 sudu 120°, 150°, 180°



Gambar L.18 Kincir air *pitchback* tampak depan



Gambar L.19 Kincir air *pitchback* tampak samping



Gambar L.20 Kincir air *pitchback* tampak atas



Gambar L.21 Pemasangan sudu pada kincir air



Gambar L.22 Pengambilan data

